



PALADIN®

BRADCO

www.paladinattachments.com



Optional thumb saddle allows operator to move obstructions out of the way without damaging the housing.

Factory Install: 28-10747
Field Install: 28-10833

FLAIL MOWERS

FOR EXCAVATORS

The Bradco® Flail Mower has been engineered to handle your toughest vegetation management jobs. They are ideal for clearing vegetation on hillsides, roadways, ditches, utility right-of-ways, riverbanks, lakes and more.


FLAIL MOWERS

FOR EXCAVATORS

FEATURES

- Cuts 4" trees and heavy brush; can cut up to 6" trees as needed
- Engineered for maximum performance and service life
- Allows operator to mow in both directions and control direction of cut material
- Available with multiple motors and mounts to fit 3- to 10-ton excavators

SPECIFICATIONS

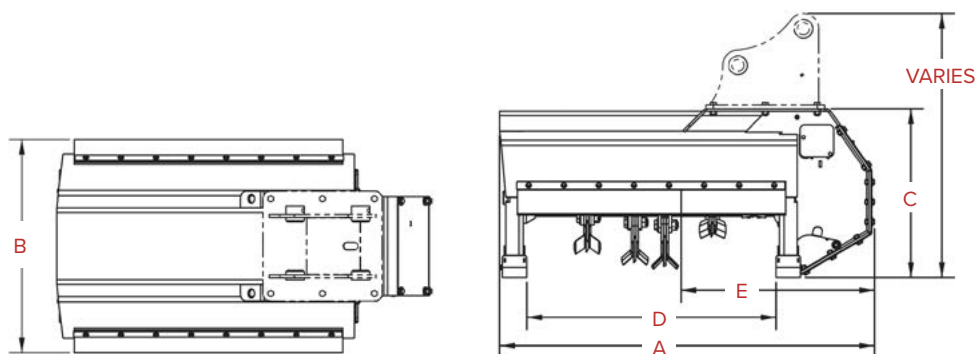

	FME30	FME30 (THUMB READY)	FME40 (THUMB READY)
ORDER CODE	23130	23131	23140
A. OVERALL LENGTH	51.50 IN. / 131 CM	51.50 IN. / 131 CM	61.50 IN. / 156 CM
B. OVERALL WIDTH	34.90 IN. / 89 CM	34.90 IN. / 89 CM	34.90 IN. / 89 CM
C. OVERALL HEIGHT	27.70 IN. / 70 CM	27.70 IN. / 70 CM	27.70 IN. / 70 CM
D. CUTTING WIDTH	30.00 IN. / 76 CM	30.00 IN. / 76 CM	40.00 IN. / 102 CM
E. CENTER OF GRAVITY - HORIZONTAL	26.80 IN. / 68 CM	26.80 IN. / 68 CM	31.80 IN. / 81 CM
WEIGHT	830 LBS / 376 KG	855 LBS / 388 KG	1175 LBS / 533 KG
MOTOR OPTION	A - F	A - F	E - H
HYDRAULIC PRESSURE	3500 PSI / 241 BAR	3500 PSI / 241 BAR	3500 PSI / 241 BAR
MOTOR A FLOW RANGE	8-9 GPM / 30-34 LPM	8-9 GPM / 30-34 LPM	-
MOTOR B FLOW RANGE	10-11 GPM / 38-42 LPM	10-11 GPM / 38-42 LPM	-
MOTOR C FLOW RANGE	12-14 GPM / 45-53 LPM	12-14 GPM / 45-53 LPM	-
MOTOR D FLOW RANGE	14-16 GPM / 53-61 LPM	14-16 GPM / 53-61 LPM	-
MOTOR E FLOW RANGE	17-22 GPM / 64-83 LPM	17-22 GPM / 64-83 LPM	17-22 GPM / 64-83 LPM
MOTOR F FLOW RANGE	22-28 GPM / 83-106 LPM	22-28 GPM / 83-106 LPM	22-28 GPM / 83-106 LPM
MOTOR G FLOW RANGE	-	-	27-33 GPM / 102-125 LPM
MOTOR H FLOW RANGE	-	-	32-40 GPM / 121-151 LPM
HYDRAULIC PORT DIAMETER	SAE #12	SAE #12	SAE #12
CASE DRAIN PORT DIAMETER	SAE #06	SAE #06	SAE #06