



Features

Increased Capacity

- Improved construction reduces weight up to 10% for larger payloads


Enhanced Performance

- Optimized profile for better filling & dumping
- Dual taper design provides enhanced heel clearance for less resistance and wear during digging

Enhanced Durability

- One-piece header design improves load distribution and durability
- Strategic placement of AR400 wear material in the cutting edge, side cutter and bottom corner to reduce wear

The **JRB® Continuous Edge** series of excavator buckets combines innovative design and advanced materials for the ultimate in job site productivity. The Continuous Edge Bucket works well for applications that require a smooth floor such as digging trenches or footings.

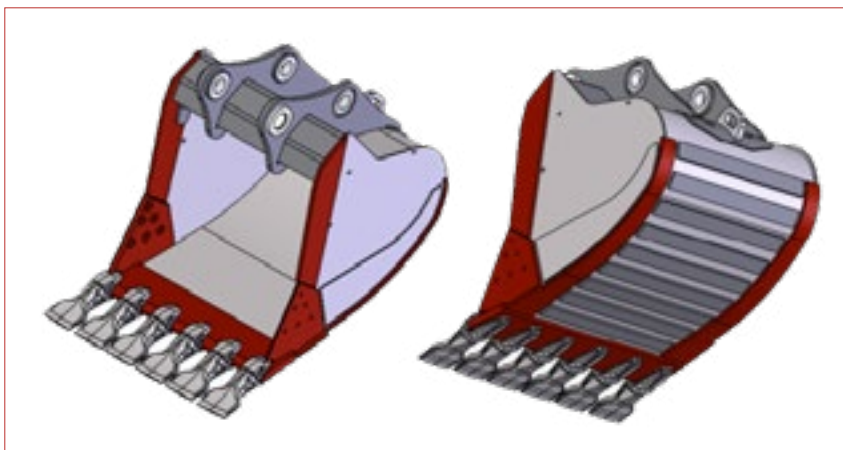

- Teeth are spaced as tightly as possible to present a continuous edge
- Corner teeth are straight/in-line with the center teeth
- Equipped with Flare/Spade teeth

Only the tooth system shown are available for the Continuous Edge buckets.

These systems were selected as they can accommodate the tight spacing of the teeth.

12T

WIDTH (IN)	RATED CAPACITY (YD ³) ISO 7451	# OF TEETH*	WEIGHT (LBS)
18	0.29	3	787
24	0.44	5	926
30	0.59	6	1,049
36	0.75	7	1,177
42	0.91	8	1,294
48	1.06	9	1,410

TOOTH SELECTIONS			
	ESCO Ultralok	VOLVO	
	U25F	15SNE	

25T

WIDTH (IN)	RATED CAPACITY (YD ³) ISO 7451	# OF TEETH*	WEIGHT (LBS)
24	0.64	3	1,764
30	0.87	4	1,947
36	1.11	5	2,161
42	1.36	6	2,400
48	1.60	7	2,628
54	1.85	7	2,800
60	2.09	8	3,020
66	2.34	8	3,175

TOOTH SELECTIONS			
	ESCO Ultralok	VOLVO	
	U35F	30SNE	

15T

WIDTH (IN)	RATED CAPACITY (YD ³) ISO 7451	# OF TEETH*	WEIGHT (LBS)
24	0.50	4	1,129
30	0.68	5	1,259
36	0.86	6	1,415
42	1.04	7	1,560
48	1.22	8	1,704

TOOTH SELECTIONS			
	ESCO Ultralok	VOLVO	
	U30F	20SNE	

35T

WIDTH (IN)	RATED CAPACITY (YD ³) ISO 7451	# OF TEETH*	WEIGHT (LBS)
30	1.07	4	2,501
36	1.37	4	2,627
42	1.66	5	2,895
48	1.96	6	3,164
54	2.27	7	3,432
60	2.58	7	3,632
66	2.87	8	3,901
72	3.17	8	4,649

TOOTH SELECTIONS			
	ESCO Ultralok	VOLVO	
	U40F	40SNE	

20T

WIDTH (IN)	RATED CAPACITY (YD ³) ISO 7451	# OF TEETH*	WEIGHT (LBS)
24	0.55	4	1,425
30	0.74	5	1,597
36	0.94	6	1,777
42	1.14	7	1,957
48	1.34	8	2,137
54	1.55	9	2,317
60	1.75	9	2,467

TOOTH SELECTIONS			
	ESCO Ultralok	VOLVO	
	U30F	30SNE	

45T

WIDTH (IN)	RATED CAPACITY (YD ³) ISO 7451	# OF TEETH*	WEIGHT (LBS)
30	1.23	3	3,017
36	1.57	4	3,257
42	1.92	5	3,600
48	2.27	5	3,883
54	2.63	6	4,244
60	2.98	6	4,499
66	3.34	7	4,807
72	3.69	8	5,150
78	4.05	8	5,381

TOOTH SELECTIONS			
	ESCO Ultralok	VOLVO	
	U45F	55SNE	

*Tooth quantity & weight based on ESCO Ultralok® teeth. Quantity and weight may vary with other tooth styles.