




# PALADIN®

SWEEPSTER

[www.paladinattachments.com](http://www.paladinattachments.com)

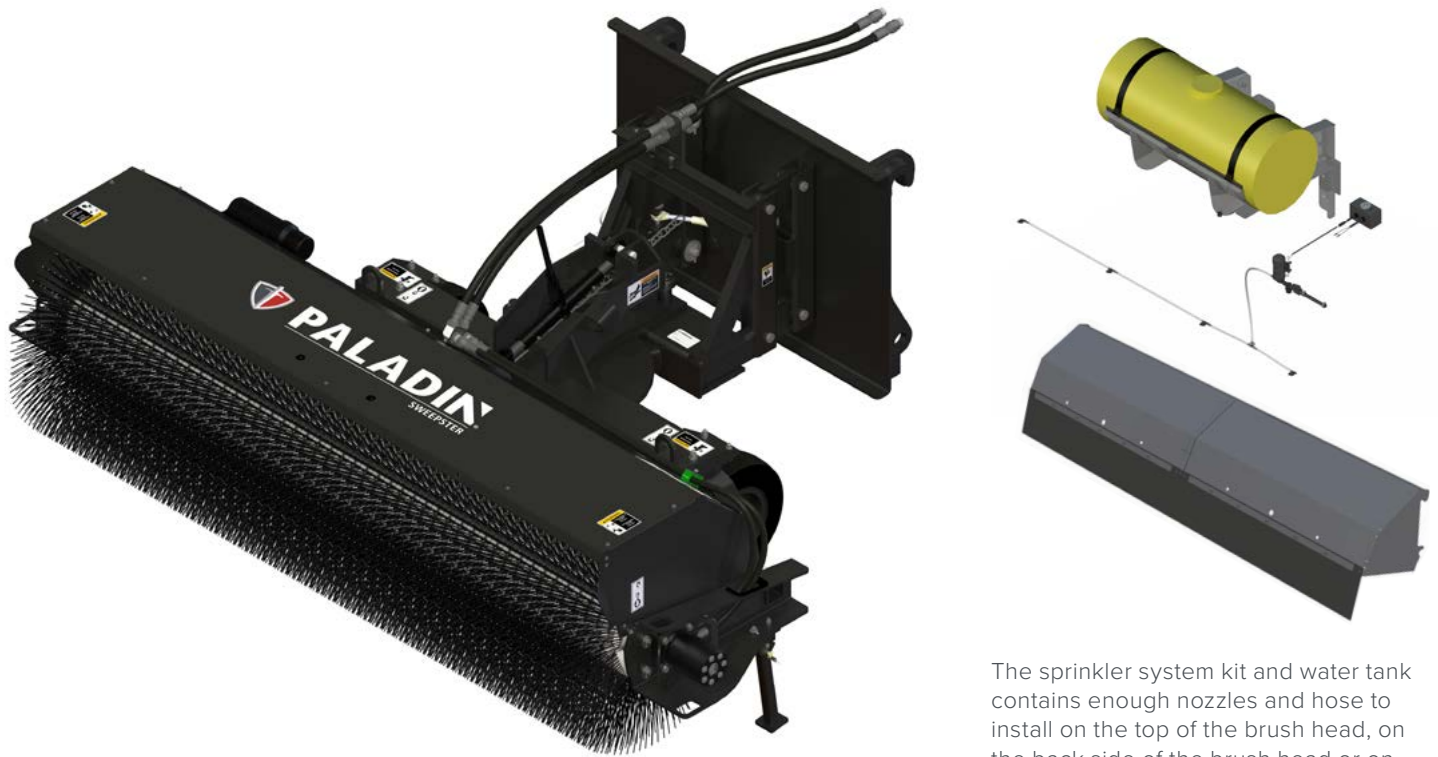

The sprinkler system kit and water tank contains enough nozzles and hose to install on the top of the brush head, on the back side of the brush head or on the front of the optional 180 hood.

## LA ANGLE SWEEPER

### FOR TRUCKS AND WHEEL LOADERS

The Sweepster LA Broom (Truck and Wheel Loader Angle Sweeper) is designed for use on large wheel loaders, trucks or tractors. Use for windrowing material left, right or straight. Available in 8- or 9-foot widths and with manual or hydraulic angling. This product is also available CE certified


# LA ANGLE SWEEPER

FOR TRUCKS AND WHEEL LOADERS

## FEATURES

- 32" bristles extend brush life
- Drive slips out of core without removing hydraulic lines from wheel motor
- Brush core is reversible for even brush wear
- Powered by hydraulic motors mounted inside brush frame
- Third valve required to operate; fourth valve required to operate optional hydraulic angle change
- Parallel linkage with casters allow sweeper to follow ground contours
- Manual angle 30 degrees left/right is standard
- Choose poly, wire or poly/wire brushl
- Casters standard

## SPECIFICATIONS

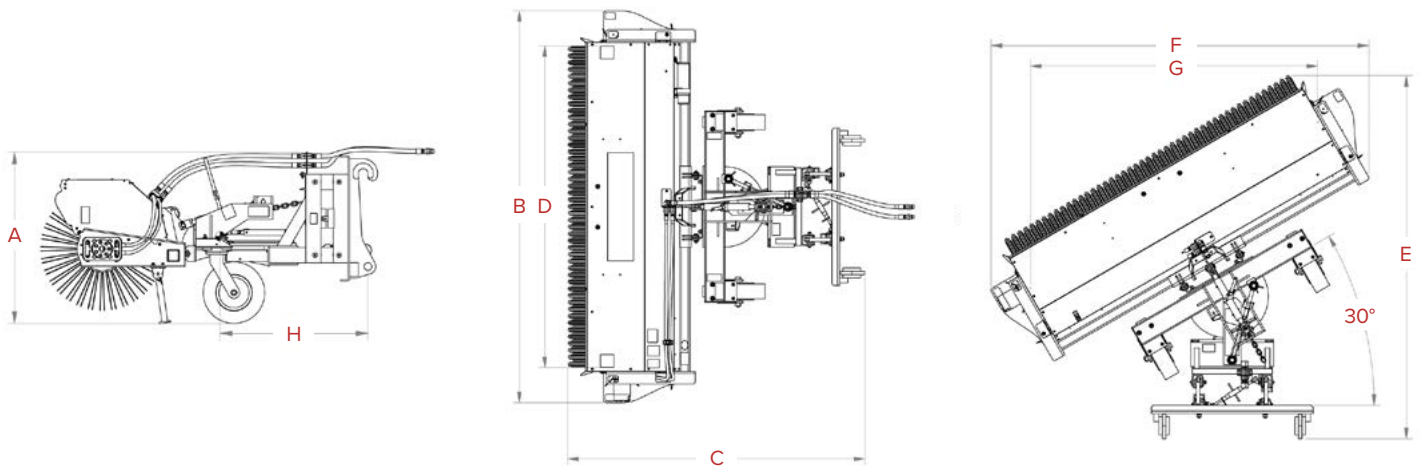

|                                        | 21319                  | 21320                  |
|----------------------------------------|------------------------|------------------------|
| A. OVERALL HEIGHT                      | 43.7 IN. / 111 CM      | 43.7 IN. / 111 CM      |
| B. OVERALL WIDTH                       | 115.8 IN. / 294 CM     | 127.5 IN. / 324 CM     |
| C. OVERALL LENGTH                      | 87.6 IN. / 222.5 CM    | 87.6 IN. / 222.5 CM    |
| D. SWEEPING WIDTH                      | 96 IN. / 243 CM        | 108 IN. / 274 CM       |
| E. OVERALL LENGTH @ 30°                | 104.3 IN. / 265 CM     | 107.3 IN. / 272.5 CM   |
| F. OVERALL WIDTH @ 30°                 | 108.5 IN. / 275.5 CM   | 118.9 IN. / 302 CM     |
| G. SWEEPING WIDTH @ 30°                | 83.2 IN. / 211 CM      | 93.6 IN. / 238 CM      |
| H. CENTER OF GRAVITY (HORIZONTAL)      |                        |                        |
| MANUAL ANGLE/SINGLE MOTOR              | 38.5 IN. / 98 CM       | 39.3 IN. / 100 CM      |
| MANUAL ANGLE/DUAL MOTOR                | 39 IN. / 99 CM         | 39.8 IN. / 101 CM      |
| WEIGHT - MANUAL ANGLE/SINGLE MOTOR*    | 1375 LBS / 624 KG      | 1425 LBS / 646 KG      |
| WEIGHT - MANUAL ANGLE/DUAL MOTOR*      | 1400 LBS / 635 KG      | 1450 LBS / 658 KG      |
| HYDRAULIC FLOW - SINGLE 25 CID MOTOR   | 15-25 GPM / 57-95 LPM  | 15-25 GPM / 57-95 LPM  |
| HYDRAULIC FLOW - DUAL 17 CID MOTOR     | 18-36 GPM / 68-136 LPM | 18-36 GPM / 68-136 LPM |
| MAXIMUM PRESSURE - SINGLE 25 CID MOTOR | 3000 PSI / 207 BAR     | 3000 PSI / 207 BAR     |
| MAXIMUM PRESSURE - DUAL 17 CID MOTOR   | 3500 PSI / 241 BAR     | 3500 PSI / 241 BAR     |

\*ADD +40 LBS FOR HYDRAULIC ANGLE