




PALADIN®

SWEEPSTER

www.paladinattachments.com

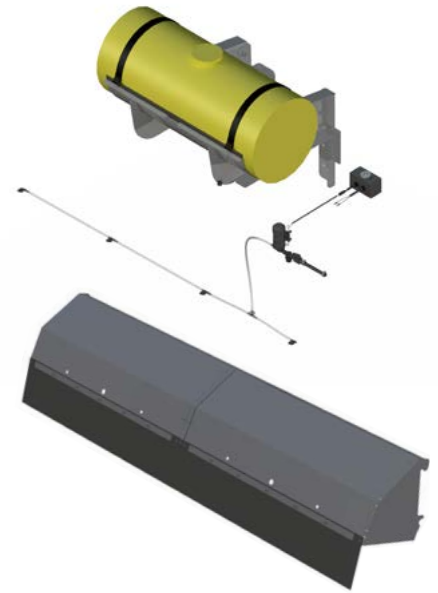

The sprinkler system kit and water tank contains enough nozzles and hose to install on the top of the brush head, on the back side of the brush head or on the front of the optional 180 hood.

WLA ANGLE SWEEPER

FOR TRUCKS AND LARGE ARTICULATED WHEEL LOADERS

The Sweepster WLA Broom (Truck and Large Articulated Wheel Loader Angle Sweeper) is designed for use on large wheel loaders up to 5 yards capacity. Use for windrowing material left, right and straight. Available in 10- and 12-foot widths and with manual or hydraulic angling. Also, handles high flows and operating pressures.


WLA ANGLE SWEEPER

FOR TRUCKS AND LARGE ARTICULATED WHEEL LOADERS

FEATURES

- 10' and 12' wide models available
- 36" diameter brush
- Dual-motor design for high torque
- Quick-change brush without breaking hydraulic lines
- Third valve required to operate; fourth valve required to operate optional hydraulic angle change
- Parallel linkage allows sweeper to follow ground contours
- Manual angle 30 degrees left/right is standard
- Choose poly, wire, or poly/wire brush

SPECIFICATIONS

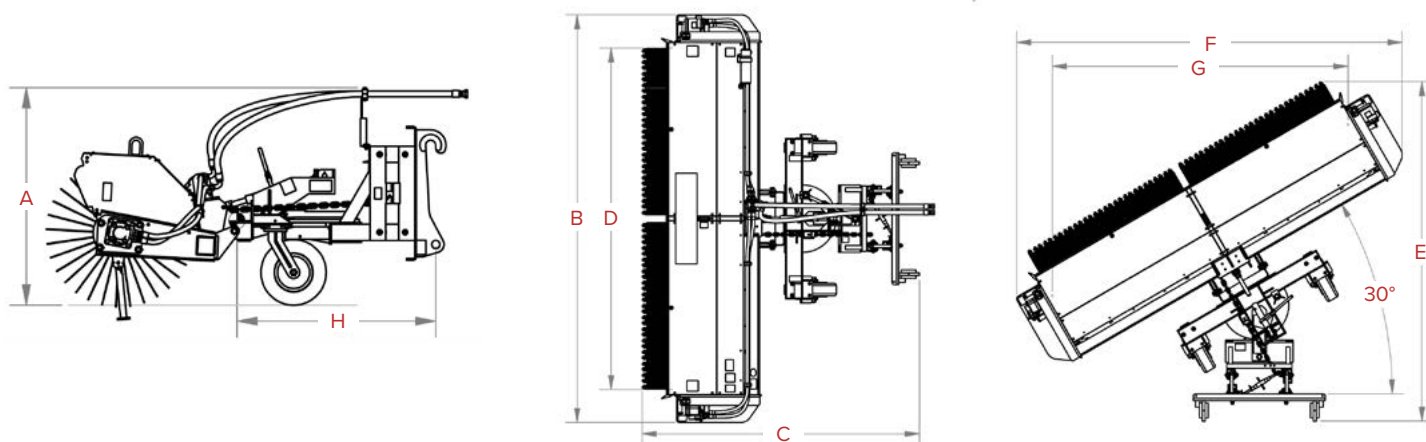

	21319	21320	21321	21343	21344	21345
A. OVERALL HEIGHT	53.2 IN. / 135.1 CM	53.2 IN. / 135.1 CM	53.2 IN. / 135.1 CM	53.2 IN. / 135.1 CM	53.2 IN. / 135.1 CM	53.2 IN. / 135.1 CM
B. OVERALL WIDTH @ 0°	147.7 IN. / 365 CM	147.7 IN. / 365 CM	147.7 IN. / 365 CM	167.7 IN. / 426 CM	167.7 IN. / 426 CM	167.7 IN. / 426 CM
C. OVERALL LENGTH @ 0°	97.9 IN. / 249 CM	97.9 IN. / 249 CM	97.9 IN. / 249 CM	97.9 IN. / 249 CM	97.9 IN. / 249 CM	97.9 IN. / 249 CM
D. SWEEPING WIDTH @ 0°	120 IN. / 304.8 CM	120 IN. / 304.8 CM	120 IN. / 304.8 CM	144 IN. / 365.8 CM	144 IN. / 365.8 CM	144 IN. / 365.8 CM
E. OVERALL LENGTH @ 30°	119.5 IN. / 303.5 CM	119.5 IN. / 303.5 CM	119.5 IN. / 303.5 CM	125.5 IN. / 318.8 CM	125.5 IN. / 318.8 CM	125.5 IN. / 318.8 CM
F. OVERALL WIDTH @ 30°	135.9 IN. / 345.2 CM	135.9 IN. / 345.2 CM	135.9 IN. / 345.2 CM	156.7 IN. / 398 CM	156.7 IN. / 398 CM	156.7 IN. / 398 CM
G. SWEEPING WIDTH @ 30°	104 IN. / 264.2 CM	104 IN. / 264.2 CM	104 IN. / 264.2 CM	129 IN. / 327.7 CM	129 IN. / 327.7 CM	129 IN. / 327.7 CM
H. CENTER OF GRAVITY	48.7 IN. / 123.7 CM	48.7 IN. / 123.7 CM	48.8 IN. / 123.9 CM	50 IN. / 127 CM	50 IN. / 127 CM	50.1 IN. / 127.3 CM
APPROX WEIGHT	2240 LBS / 1016 KG	2240 LBS / 1016 KG	2240 LBS / 1016 KG	2365 LBS / 1073 KG	2365 LBS / 1073 KG	2365 LBS / 1073 KG
FLOW RANGE	12-30 GPM / 45-114 LPM	18-45 GPM / 68-170 LPM	24-60 GPM / 91-227 LPM	12-30 GPM / 45-114 LPM	18-45 GPM / 68-170 LPM	24-60 GPM / 91-227 LPM
HYDRAULIC MOTOR DISPLACEMENT	11.9 CI	11.9 / 23.9 CI	23.9 CI	11.9 CI	11.9 / 23.9 CI	23.9 CI
MAXIMUM PRESSURE	3000 PSI / 207 BAR	3000 PSI / 207 BAR	3000 PSI / 207 BAR	3000 PSI / 207 BAR	3000 PSI / 207 BAR	3000 PSI / 207 BAR
MAXIMUM ARTICULATION	30°	30°	30°	30°	30°	30°