



# PALADIN®

BRADCO

[www.paladinattachments.com](http://www.paladinattachments.com)



## COLD PLANERS

### FOR SKID STEER LOADERS

Paladin's™ cold planer is a highly effective tool for small milling jobs, as well as repairing asphalt and concrete potholes and frost heaves, cutting curbs, texturing pavement, and removing lane stripes and roadway around manholes.



# COLD PLANERS

## FOR SKID STEER LOADERS

### FEATURES

- Independent self-leveling depth adjustment plates
- Planetary drive delivers high torque
- High rear spoil clearance to prevent recirculation of material
- Protective shields for hydraulic & electrical components
- Fully adjustable with electro-hydraulic controls
- The option for manual depth and tilt is exclusively available on the standard flow Cold Planer
- Convenient for milling frost heaves, expansion joints, railroad approaches, etc.
- Water nozzle kit standard with intergral nozzle pots

### SPECIFICATIONS

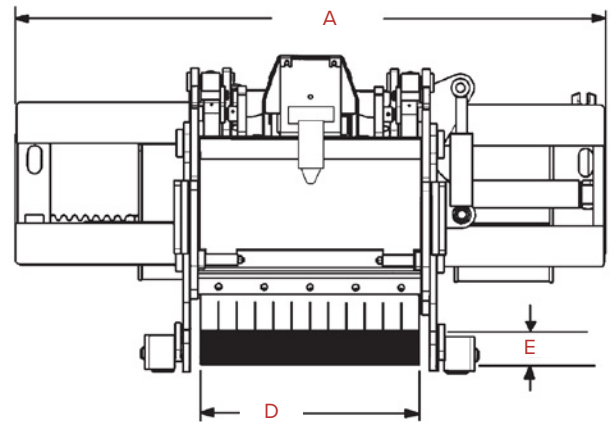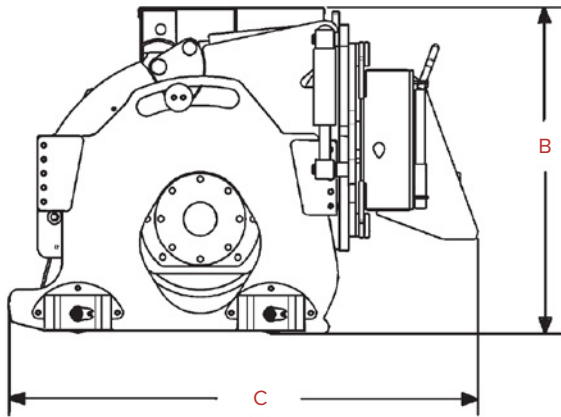

|                   | SP300                  | HP400                  | HP450                  | HP600                  | HP750                  | HP1000                 |
|-------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| A. OVERALL WIDTH  | 51.94 IN. / 1295 MM    | 64.94 IN. / 1649 MM    | 64.94 IN. / 1649 MM    | 64.94 IN. / 1649 MM    | 64.94 IN. / 1649 MM    | 64.94 IN. / 1649 MM    |
| B. OVERALL HEIGHT | 32.15 IN. / 817 MM     | 34.57 IN. / 878 MM     | 34.57 IN. / 878 MM     | 34.57 IN. / 878 MM     | 34.57 IN. / 878 MM     | 34.57 IN. / 878 MM     |
| C. OVERALL LENGTH | 43.86 IN. / 1114 MM    | 50.30 IN. / 1278 MM    | 50.30 IN. / 1278 MM    | 50.30 IN. / 1278 MM    | 50.30 IN. / 1278 MM    | 50.30 IN. / 1278 MM    |
| D. PLANING WIDTH  | 12 IN. / 305 MM        | 16 IN. / 406 MM        | 18 IN. / 457 MM        | 24 IN. / 610 MM        | 30 IN. / 762 MM        | 40 IN. / 1016 MM       |
| E. PLANING DEPTH  | 0 - 5 IN. / 0 - 127 MM | 0 - 5 IN. / 0 - 127 MM | 0 - 5 IN. / 0 - 127 MM | 0 - 5 IN. / 0 - 127 MM | 0 - 5 IN. / 0 - 127 MM | 0 - 5 IN. / 0 - 127 MM |
| DRUM DIAMETER     | 19 IN. / 483 MM        | 22 IN. / 559 MM        | 22 IN. / 559 MM        | 22 IN. / 559 MM        | 22 IN. / 559 MM        | 22 IN. / 559 MM        |
| NUMBER OF PICKS   | 37                     | 43                     | 45                     | 57                     | 69                     | 89                     |
| WEIGHT            | 1500 LBS / 680 KG      | 2150 LBS / 975 KG      | 2200 LBS / 998 KG      | 2400 LBS / 1087 KG     | 2600 LBS / 1179 KG     | 3100 LBS / 1406 KG     |
| FLOW REQUIREMENT  | 15 - 22 GPM            | 22 - 40 GPM            | 22 - 40 GPM            | 22 - 40 GPM            | 22 - 40 GPM            | 31 - 40 GPM            |



**PALADIN**

2800 N. Zeeb Road // Dexter, MI 48130 // 833-723-1843 // [www.paladinattachments.com](http://www.paladinattachments.com)

2025.10.17