



Construction Utility Forks


Class 100, 600-900

JRB Construction Utility Forks by Paladin turn wheel loaders into heavy-duty material handling machines to safely transport large loads of construction-related materials.

Safely navigate job sites carrying construction materials like pallets, pipes and related equipment with our rugged CUFs.

Perfect for construction or utility projects. Our standard offering includes many popular sizes and configurations in both manual and hydraulic operation formats.

Special order carriage width and tine length available upon request. Call JRB for sizing, pricing, and availability.

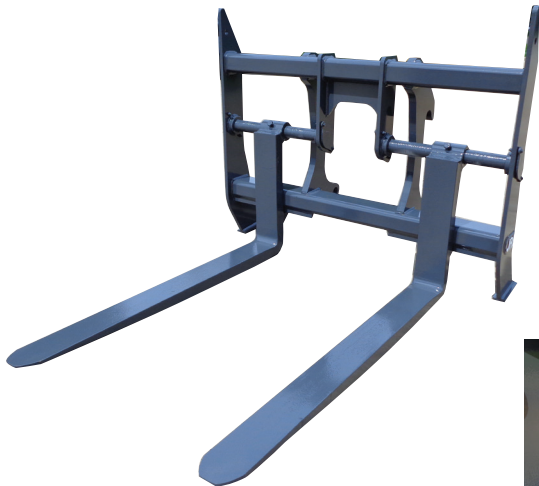

Easy Manual Tine Placement

Hydraulic Option Available



JRB Quick Hitch Mount Standard,
Pin-On Mount Available



The Power of Combined Excellence®

BRADCO

CP

CUSTOMWORKS

FFC


HARLEY

JRB

McMILLEN

SWEEPSTER

Construction Utility Forks (CUFs)

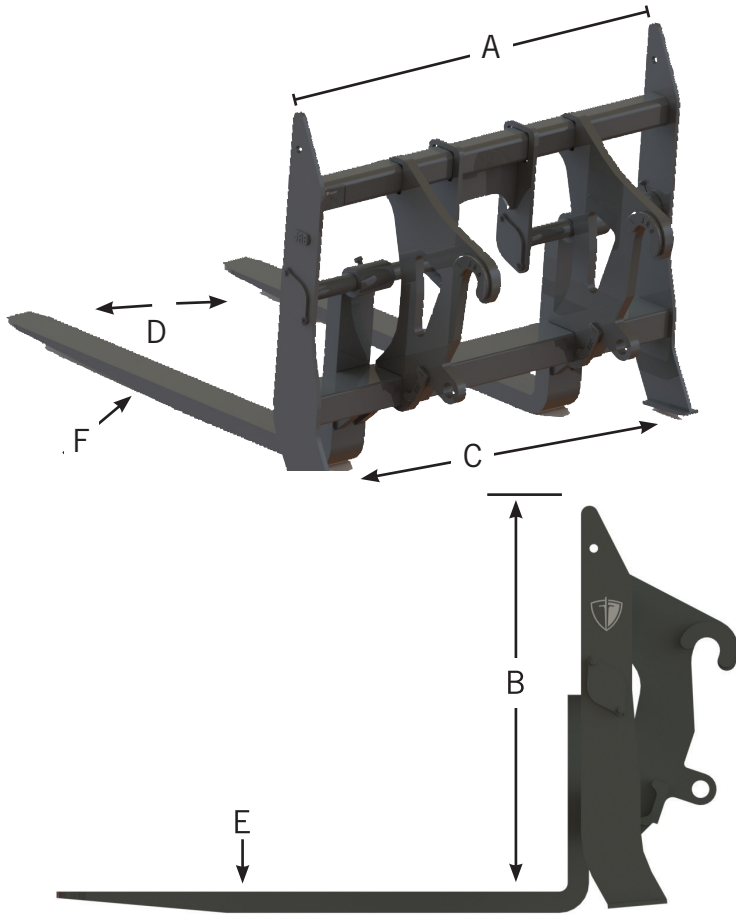

- Available with manually adjustable tines or hydraulically actuated tines for side-to-side adjustments from the cab
- Third function loader hydraulics and jumper hose kit for Quick Coupler required for hydraulic fork operation. Hydraulic forks supplied with attachment side whip hoses
- Tine static load capacities are rated beyond loader lift capabilities
- Fork carriage widths range from 60" to 106"
- Tine lengths range from 48" to 96"
- Optional hydraulic side shift rotation available
- JRB Quick Hitch Mount standard, Pin-on options available



"Paladin attachments have what it takes to get the job done **quickly** and **efficiently**."
Ron C. - Equipment Dealer

Class	Tine Adjustment Style	"A" Frame Width	"B" Frame Height	"C" Maximum Tine Spacing	"D" Minimum Tine Spacing	"E" Tine Size	"F" Load Capacity at 24" CTR
100	Manual	61"	48"	59"	10"	2" X 4"	8,400 lbs.
	Hydraulic	61"	48"	59"	10"		
600	Manual	108"	60-1/2"	103"	28"	3" X 7"	32,250 lbs.
	Hydraulic	98"	53-1/2"	92"	46-1/2"		
700-800	Manual	108"	63-3/25"	103"	38"	3-1/2" X 8"	51,700 lbs.
	Hydraulic	108"	63-3/25"	103"	62"		
900	Manual	108"	63-3/25"	103"	40"	4" X 8"	67,500 lbs.
	Hydraulic	108"	63-3/25"	103"	64"		