


HEAVY-DUTY



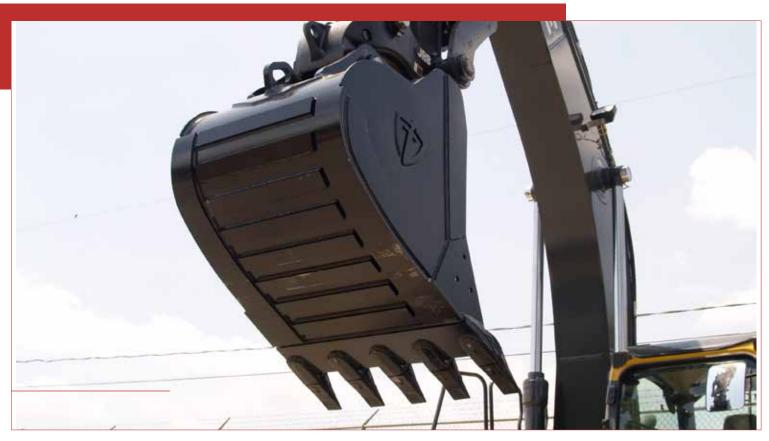

Features

Enhanced Performance

- Optimized profile for better filling & dumping
- Dual taper design provides enhanced heel clearance for less resistance and wear during digging

Increased Capacity

Improved construction reduces weight up to 10% for larger payloads

Enhanced Durability

- One-piece header design improves load distribution and durability
- Strategic placement of AR400 wear material in the cutting edge, side cutter and bottom corner to reduce wear


The JRB® Heavy-Duty series of excavator buckets combines innovative design and advanced materials for the ultimate in job site productivity. Use the JRB® Heavy-Duty Bucket to tackle tough digging and material handling conditions with solid results.





EAVY-DUTY

FOR 12-45mT EXCAVATORS

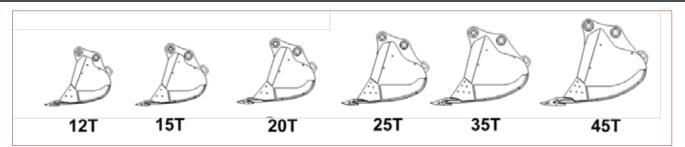

12T

	Rated		
Width (in)	Capacity (yd³) ISO 7451	# of Teeth	Weight (lbs)
18	0.29	3	785
24	0.44	4	901
30	0.59	4	1,001
36	0.75	5	1,129
42	0.91	5	1,222
48	1.06	6	1,338

Tooth Selections			
Aftermarket	ESCO Ultralok	Deere TK Series	Kmax
1250	1125	TK300	K15

25T

Width (in)	Rated Capacity (yd³) ISO 7451	# of Teeth	Weight (lbs)
24	0.64	3	1,726
30	0.87	4	1,897
36	1.11	5	2,099
42	1.36	5	2,289
48	1.60	6	2,504
54	1.85	6	2,676
60	2.09	7	2,884
66	2.34	7	3,039

Tooth Selections			
Aftermarket	ESCO Ultralok	Deere TK Series	Kmax
J350	U35	TK350	K25

15T

Width (in)	Rated Capacity (yd³) ISO 7451	# of Teeth	Weight (lbs)
24	0.50	4	1,095
30	0.68	4	1,190
36	0.86	5	1,338
42	1.04	5	1,448
48	1.22	6	1,584

Tooth Selections				
ESCO Deere TK Aftermarket Ultralok Series Kmax				
J300	U30	TK300	K20	

35T

Width (in)	Rated Capacity (yd³) ISO 7451	# of Teeth	Weight (lbs)
30	1.07	3	2,451
36	1.37	4	2,651
42	1.66	4	2,851
48	1.96	5	3,125
54	2.27	5	3,326
60	2.58	6	3,600
66	2.87	6	3,800
72	3.17	7	4,075

Tooth Selections					
ESCO Deere TK Aftermarket Ultralok Series Kmax					
J450 U40 TK450 K40					

20T

Width (in)	Rated Capacity (yd³) ISO 7451	# of Teeth	Weight (lbs)	
24	0.55	3	1,394	
30	0.74	4	1,566	
36	0.94	5	1,747	
42	1.14	5	1,893	
48	1.34	6	2,074	
54	1.55	6	2,220	
60	1.75	7	2,406	
Tooth Selections				
Aftermarket	ESCO Ultralok	Deere TK Series	Kmax	
J350	U30	TK350	K25	

45T

Aftermarket


J450/460

Width (in)	Rated Capacity (yd³) ISO 7451)	# of Teeth	Weight (lbs)
30	1.23	3	2,966
36	1.57	4	3,189
42	1.92	4	3,440
48	2.27	5	3,797
54	2.63	5	4,067
60	2.98	6	4,397
66	3.34	6	4,613
72	3.69	7	4,939
78	4.05	7	5,169
Tooth Selections			
	ESCO	Deere TK	

Ultralok

Series

Additional options and tooth selections are available. Please refer to the Paladin Full Line Price Book or contact customer service for more information



Kmax